INSPIRED BY EFFICIENCY

Ligações para Placas

DIP switch settings are read at reset (power-up) only.

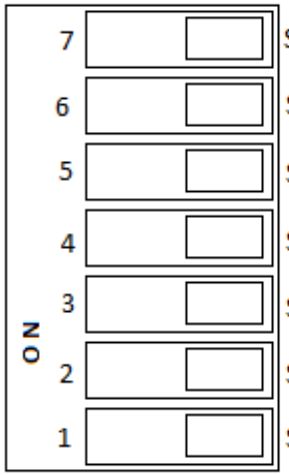

		ON	OFF
7	SW7: RollerDrive selection	See chart	See chart
6	SW6: RollerDrive selection	See chart	See chart
5	SW5: Downstream	Jog/Rev ON	Standard
4	SW4: Upstream	Jog/Rev ON	Standard
3	SW3: Singulation	Enhanced	Standard
2	SW2: Rotation	CW	CCW
1	SW1: Logic	PNP	NPN

	EC100	EC110 Cabo Cinza	EC110 Cabo Amarelo	EC120
SW7	OFF	ON	ON	OFF
SW6	OFF	OFF	ON	ON

Roller Drives com Cabo Amarelo = SW6 fica em ON (ligado), SW7 fica em ON (ligado)
Roller Drives com Cabo Cinza = SW6 fica em OFF (desligado), SW7 fica em ON (ligado)

ATENÇÃO:

Roller Drivers com Cabo Cinza = SW6 fica em OFF (desligado), SW7 fica em ON (ligado)
Roller Drivers com Cabo Amarelo = SW6 fica em ON (ligado), SW7 fica em ON (ligado)

INTERROLL LOGÍSTICA LTDA.
AV.VICENZO GRANGHELLI 856 DISTRITO INDUSTRIAL
JAGUARIÚNA-SP
CEP 13820-000
BRAZIL
TEL. +55 19 35150898
BR.SALES@INTERROLL.COM
INTERROLL.COM